



KLIXON | 1NT SERIES FIXED TEMPERATURE THERMOSTATS

WORLD CLASS PERFORMANCE

The 1NT has been designed to be applied for use in many HVAC and appliance products as either a regulating or overtemperature safety switch.

The 1NT uses Klixon® technology and is available in several mounting options.

Sensata Technologies has been a leading global supplier of pressure sensors and switches for over 50 years.

Key Features

- ISO9001: 2000 certification
- Factory inspected for continuity and contact resistance
- Global sales and technical support
- Ambient temperature rating from -40°C to 240°C (-40°F to 464°F)
- 1NT base provides:
- Low cost
- High temperature capability
- Clean processing
- High impact strength
- Low static generation
- Bi-metal disc is factory pre-set to achieve:
- Operation at requested temperatures
- Tamperproof settings


- Product innovations include:
- Solid metal-to-metal terminal construction
- Current free spring
- One piece transfer mechanism
- Switch actions:
- Automatic reset: Available with both normally open and normally closed switch logic
- Manual reset: Mechanical reset device
- Trip free manual reset: UL M2 class rating that resists consumer tampering
- One shot: meets agency requirements for single operation device

Applications

- Microwave ovens
- Sandwich makers
- Rice cookers
- Hair dryers
- Fan heaters
- Vacuum cleaners
- Gas / electric furnaces
- Espresso machines
- Tea makers
- Automotive / truck



Available Constructions

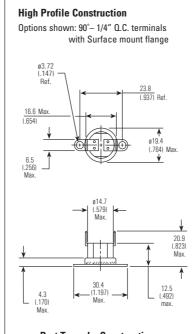


Part Types by Construction

1NT01 Auto Reset / Silver Contacts 1NT11 Auto Reset / Gold Contacts 1NT09 One Shot: -35°C (-31°F) Reset 1NT10 One Shot: 0°C (32°F) Reset

Low Profile Construction 4 Post


Options shown: 45° – 1/4" Q.C. terminals with 4 post and flat Al cup



1NT02 Auto Reset / Silver Contacts 1NT02TL Low Profile / One Shot 1NT20 Auto Reset / Gold Contacts

Manual Reset Construction Options shown: Flat 1/4" Q.C. terminals


with Airstream mount cup



1NT08 Manual Reset / Silver Contacts 1NT12 Manual Reset / Gold Contacts 1NT15 Trip Free MR / Silver Contacts 1NT19 Trip Free MR / Gold Contacts

All dimensions mm (in.)

Numbering System

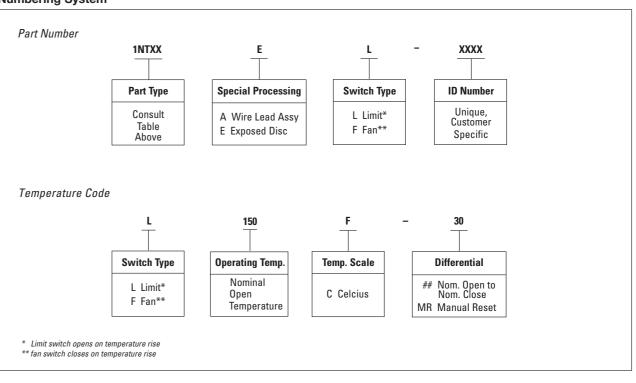



1NT Series Electrical Ratings

The 1NT series of thermostats has been recognized by safety agencies, including UL, Canadian–UL and KEMA. Agency ratings are presented below as a general guide. However, the temperature settings, mechanical, electrical, thermal and environmental conditions of the specific application may differ significantly from agency test conditions. Therefore, the user must not rely solely on the agency ratings presented here, but must perform its own testing

of the product to confirm that the thermostat selected will operate as intended over the useful design life of the user's applications.

UL and C-UL

Туре	Max.	Temp.	Cycles	S Electrical Poting		
	°C	°F	(X 1000)	Electrical Rating		
NT01, 02	204	400	100	120 Vac	0 - 9 amps 10 - 17 amps*	
				240 Vac	0 - 5 amps 6 - 17 amps*	
				277 Vac	7.2 amps	
1NT08, 15, 08E**	204	400	1 + 5	240 Vac	25 amps	
1NT09, 10	204	400	1-Shot	240 Vac 277 Vac	25 amps 7.2 amps	
1NT11, 20	204	400	100	125 VA 30 Vdc	1 amp	
1NT12, 19	204	400	1 + 5	125 VA		
1NT01E, 02E**	204	400	100	120 Vac	10 amps	

^{*} UL rated at these current levels at specific open/close temperatures. When applying to these electrical levels, nominal open/close temperatures must be considered to determine if the thermostat selected will operate as intended in the user's application. Please consult a Sensata Engineer for additional clarification.

KEMA

Туре	Max. Temp.	Cycles (X 1000)	Electrical	
	°C	(unless otherwise specified)	(Rating)*	
1NT01, 02	204	100	240 Vac 0 - 5 amps (1.66)A 6 - 13.5 amps (1.66)A**	
		30 30	240 Vac16(5)A 400 Vac4(1)A	
1NT02TL	204	1 cycle	240 Vac 16(5)A	
1NT08	204	10 10	240 Vac 16(5)A 400 Vac 4(1)A	
1NT09	204	1 cycle	240 Vac 16(5)A	
1NT11	204	100	30 Vdc1A	
1NT15	204	10	240 Vac 16(5)A	
1NT20	204	100	30 Vdc1A	

^{*} Parenthesis indicate inductive load ratings.

Standard Temperatures, Tolerances and Differential

Automatic Reset Thermostats

Nominal Top		Min. Bottom			Standard Tolerances			s		
Tempe	erature	Tempe	Temperature Differ		Differential		Open		Close	
°C	°F	°C	°F	°C	°F	°C	°F	°C	°F	
18 to 27	65 to 80	-33	-26	11 to 16 17 to 21 22 to 33	20 to 29 30 to 38 39 to 59	±3.0 ±3.0 ±3.0	±5.5 ±5.5 ±5.5	±4.0 ±4.5 ±5.5	±7.5 ±8.5 ±10.0	
28 to 80 and *81 to 93	81 to 176 and 177 to 199	-33 50	-26 122	11 to 13 14 to 16 17 to 33	20 to 23 24 to 29 30 to 59	±3.0 ±3.0 ±3.0	±5.5 ±5.5 ±5.5	±4.0 ±4.5 ±5.0	±7.5 ±8.5 ±9.0	
*94 to 121	*200 to 249	50	122	11 to 16 17 to 21 22 to 33 34 to 55	20 to 29 30 to 38 39 to 59 60 to 99	±3.5 ±3.5 ±3.5 ±5.5	±6.5 ±6.5 ±6.5 ±10.0	±4.5 ±5.5 ±6.5 ±10.0	±8.5 ±10.0 ±12.0 ±20.0	
122 to 149	250 to 300	50	122	14 to 21 21 to 33 34 to 55	24 to 38 39 to 59 60 to 99	±4.0 ±4.0 ±5.5	±7.5 ±7.5 ±10.0	±5.5 ±8.0 ±11.0	±10.0 ±14.5 ±20.0	
150 to 177	301 to 399	50	122	22 to 33 34 to 44 45 to 55	39 to 59 60 to 79 80 to 99	±5.0 ±5.5 ±5.5	±9.0 ±10.0 ±10.0	±9.0 ±11.0 ±11.0	±16.5 ±20.0 ±20.0	
178-204**	351 to 399	50	122	22 to 33* 34 to 44 45 to 55	39 to 59 60 to 79 80 to 99	±5.0 ±5.5 ±5.5	±9.0 ±10.0 ±10.0	±9.0 ±10.0 ±10.0	±16.5 ±20.0 ±20.0	

^{*} Not valid for Fan Devices


Manual Reset and One-Shot Thermostats

Nominal Top Temperature		Open Tolerances		
°C	°F	°C	°F	
<60	<140	±4.0	±7.5	
61 TO 160	141 to 320	±5.0	±9.0	
161 TO 204	321 to 399	±6.0	±11.0	



Accessories and Options

Cup Styles

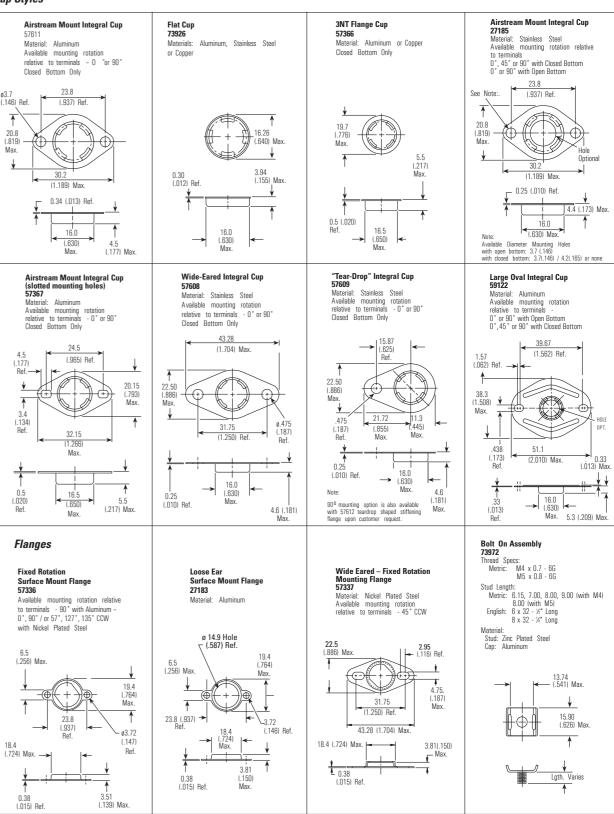

All dimensions mm (in.)


a Sensata Engineer for ad ** "E" means exposed disc.

^{**} KEMA rated at these current levels at specific open/close temperatures. When applying to these electrical levels, nominal open/close temperatures must be considered to determine if the thermostat selected will operate as intended in the user's application. Please consult a Sensata Engineer for additional clarification.

^{**} Top Temp for Fan Devices cannot exceed 380°F (193°C)

59 Rue Emile Deschanel, 92400 Courbevoie, France Industrie@jbcontrols.com Tel: + 33 (0)1 46 91 93 30 www.jbc-aero.com www.jbcontrols.com

Accessories and Options (cont.)

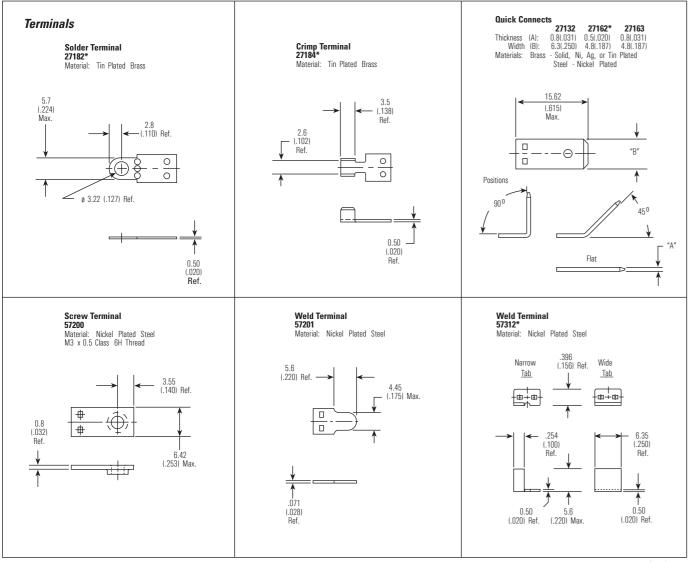

*10A Max. on all terminals 0.51 (.020) thick All dimensions mm (in.)

1NT Series Agency Listings

T	Agency Region				
Туре	UL/C-UL N. America	KEMA Europe	METI Japan		
1NT01, 02	•	•	•		
1NT08	•	•	•		
1NT09, 10	•	•	•		
1NT11, 12, 19, 20	•	•	•		
1NT15	•	•	•		
1NT01E, 02E	•	•	•		
Reference Numbers	File: E9977 Category: XAPX2 XAPX8	KEMA cert # EN2014531.16			

Important Notice

Users are solely responsible for design application and function of the end use product. Users must evaluate the suitability of these devices to their application with respect to temperature settings, mechanical cycle life, electrical loading and environmental conditions. These devices are not environmentally sealed and have exposed electrical components. They are not intended for use in applications where exposure to condensed or dripping liquids, immersion in liquid, or exposure to other environmental contaminants may occur. In such cases, use of environmentally sealed devices such as the 3NT is recommended. Excessive mechanical cycling, high electrical loading or exposure to liquids or environmental contaminants as noted above can compromise electrical insulating properties of the device. Such conditions may result in insulation breakdown and accompanying localized electrical heating. The device may remain permanently closed or open as a result of these conditions, as well as at normal end-of-life.

Sample Order Placement

To enable Sensata Technologies to serve you in a quicker, more efficient manner, please be prepared to provide the following information when requesting samples:

- 1. Detailed application description
- 2. Estimated yearly usage.
- 3. Opening and closing temperatures
- 4. Max. temperature tolerances allowable
- Switch type
- 6. Mounting style desired
- 7. Terminal orientation and material
- 8. Electrical load

Other conditions which are likely to affect the 1NT operation should also be described. These include:

- 1. Maximum temperature exposure
- 2. Location with respect to heat source
- 3. Temperature transfer medium (air, metal surface, etc)
- 4. Possible contamination sources (lint, chemical fumes, liquid, condensation, humidity, etc.)

When ordering thermocouple samples, specify whether J, K, or T type and the lead length desired. Standard wire size is 30 Ga..

Thermostat Handling Tips

- 1. Exposed disc devices should be kept free of dust and particulates, liquid and condensation. The face of the disc should never be snapped.
- 2. Mounting screws and drivers for use with smaller integral cups and flanges should be sized to provide adequate clearance to the thermostat body.
- The installation force applied to the cup face should not exceed 66.7N (15 lbs.)
- 4. The maximum reset force on the manual reset and trip free button is 22.2N (5 lbs.).